

Cu-ETP T2 PCB copper strip

Copper factory, more than 10 years manufacture experience, attained ISO9001, work on OEM and ODM projects..

1. Introduction of the Cu-ETP T2 PCB copper strip

Cu-ETP T2 Copper strip has excellent electrical conductivity, thermal conductivity, corrosion resistance , weather resistance and processing properties, can be welded and brazed.

2. Grade and temper for Cu-ETP T2 PCB copper strip

Grade: Cu-ETP, JIS-C1100, ASTM-C11000, CDA110, GB- T2 ,BS-C102

Temper: O, 1/4H, 1/2H, H, EH

3. Chemical composition of Cu-ETP T2 PCB copper strip

Cu+Ag: ≥99.90

Sn : ≤0.002

Zn: ≤0.005

Pb: ≤0.005

Ni: ≤0.005

Fe: ≤0.005

Sb : ≤0.002

S : ≤0.005

As : ≤0.002

Bi: ≤0.001

O: ≤0.06

Impurities: ≤0.1

4. Dimension and tolerance of Cu-ETP T2 PCB copper strip

Thickness (mm)	Tolerance (mm)	Width (mm)	Tolerance (mm)
0.1--0.50	±0.01	10--100	±0.05
0.51--1.0	±0.015	101--300	±0.1
1.1--1.5	±0.02	301--600	±0.2
1.6--3.0	±0.03		±0.3

5. Mechanical properties for Cu-ETP T2 PCB copper strip

Address: No.16 Shuanggang street, Tangchun Village, Liaobu Town, 523407 Dongguan , Guangdong, China

Phone: +86-769-89800565

E-mail:sales@intmc.com

Grade	Temper	Thickness /mm	Tensile strength	Elongation (%)	Vickers hardness HV
			(MPa)		
T2 、 T3	M (soft)	≥0.2	≥195	≥30	≤70
TU1、 TU2	Y4 (1/4H)		215~275	≥25	60~90
TP1、 TP2	Y2 (1/2H)		245~345	≥8	80~110
	Y (H)		295~380	≥3	90~120
	T (HH)		≥350	—	≥110

6. Application of Cu-ETP T2 PCB copper strip

Cu-ETP T2 copper strip is often used in related applications, like Hardware industry, electronic parts. Electrical components , connectors, mold parts, construction, aviation, military, decoration, etc

7. Manufacture plant of Cu-ETP T2 PCB copper strip



8. Tests and inspection for Cu-ETP T2 PCB copper strip

Test instrument : Metallographic Microscope; Digital Light Processor; Strength Tester; Hardness Tester.



9. Mill certificate for Cu-ETP T2 PCB copper strip



Test Report

No. SHAEC1827228301

Date: 08 Dec 2018

Page 4 of 4

Sample photo:




SGS authenticate the photo on original report only

*** End of Report ***

10. Packing and shipping for Cu-ETP T2 PCB copper strip

Packing:

First wrapped by anti-rust paper, second wrapped by plastic film, then packed by wooden box or wooden pallet ..

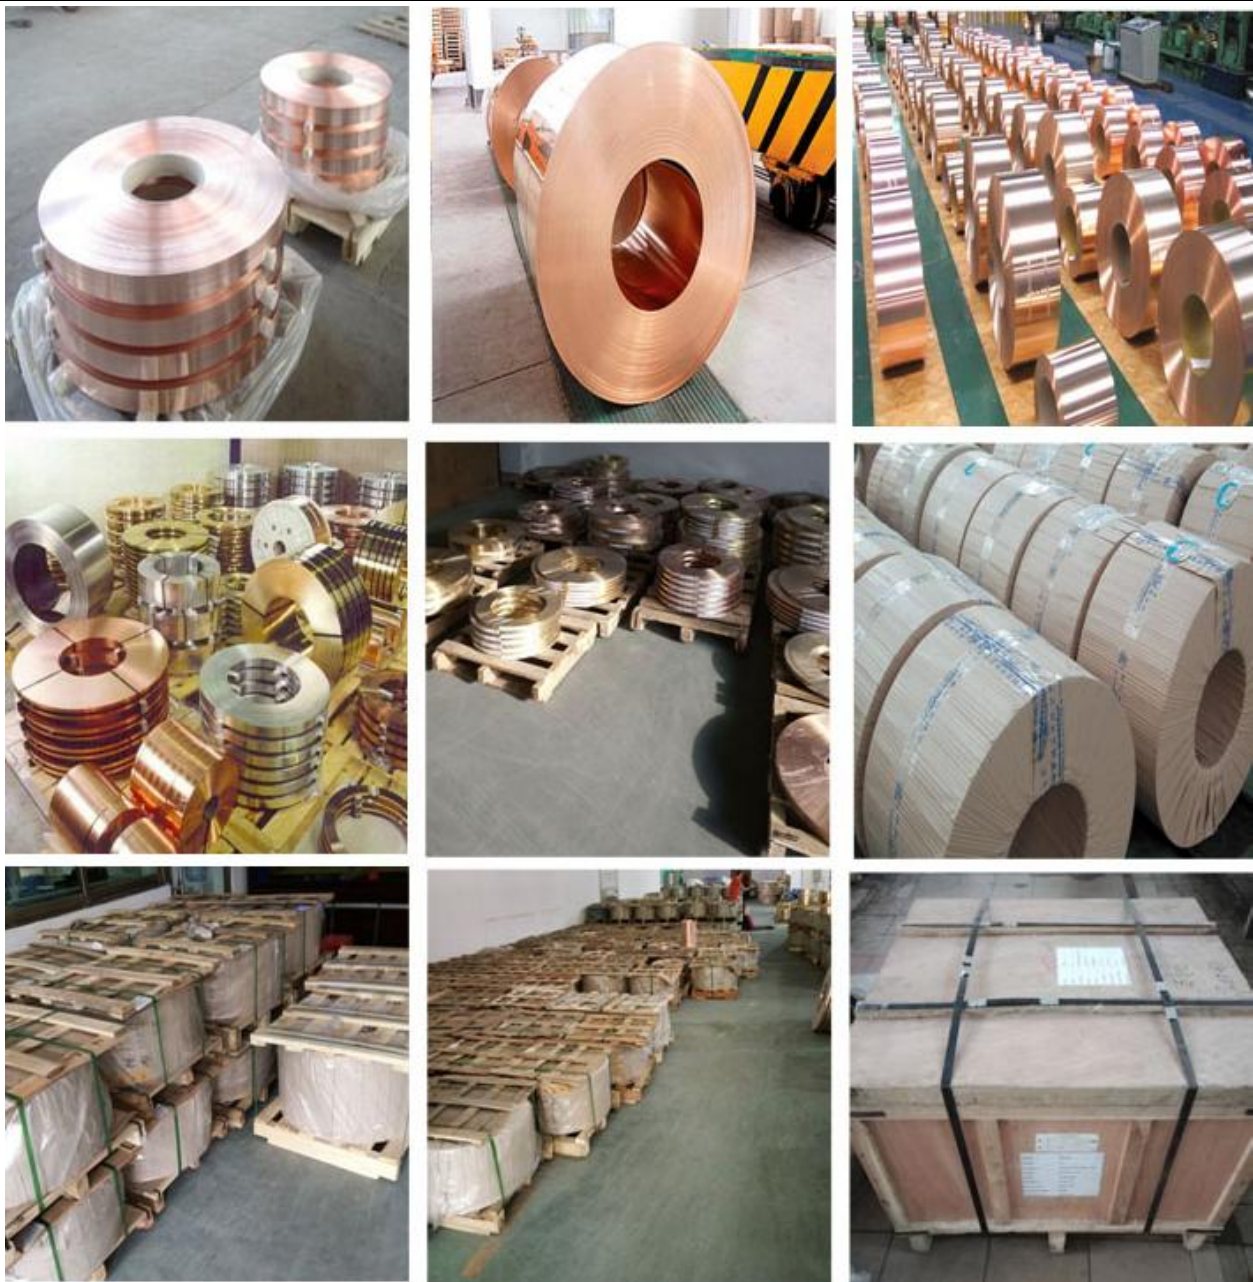

Shipping:

We will choose the best way according to customer's requests.

1. By Air, to the indicated airport.
2. By Express (FedEx, UPS, DHL, TNT, EMS), to the indicated address.
2. By Sea, to the indicated sea port.

Address: No.16 Shuanggang street, Tangchun Village, Liaobu Town, 523407 Dongguan , Guangdong, China

Phone: +86-769-89800565

E-mail:sales@intmc.com



11. Questions and Answers

a1. Do you have ISO certificate?

Yes, we obtained ISO9001

a2. How long is your delivery time for copper strip?

If the master coil is available, 3-7 days do slitting will be ready , if not, will need 20-25 days for new production.

a3. Can you help us to choose suitable material?

Yes, we can recommend the most suitable material according to your application.

a4. How do you control quality?

We produce strictly according to customer's drawings and requests, here are strict control plan in every process, full check of each parts, strive to provide customer 100% quality products, ROHS/SGS test report, material certificate are available.

a5. Do you provide sample? Free or charge?

Yes, if the sample in stock available, free of charge, if not, need to charge some mfg cost.